


GMS 10.0 Tutorial

MODFLOW – Conceptual Model Approach I

Build a basic MODFLOW model using the conceptual model approach

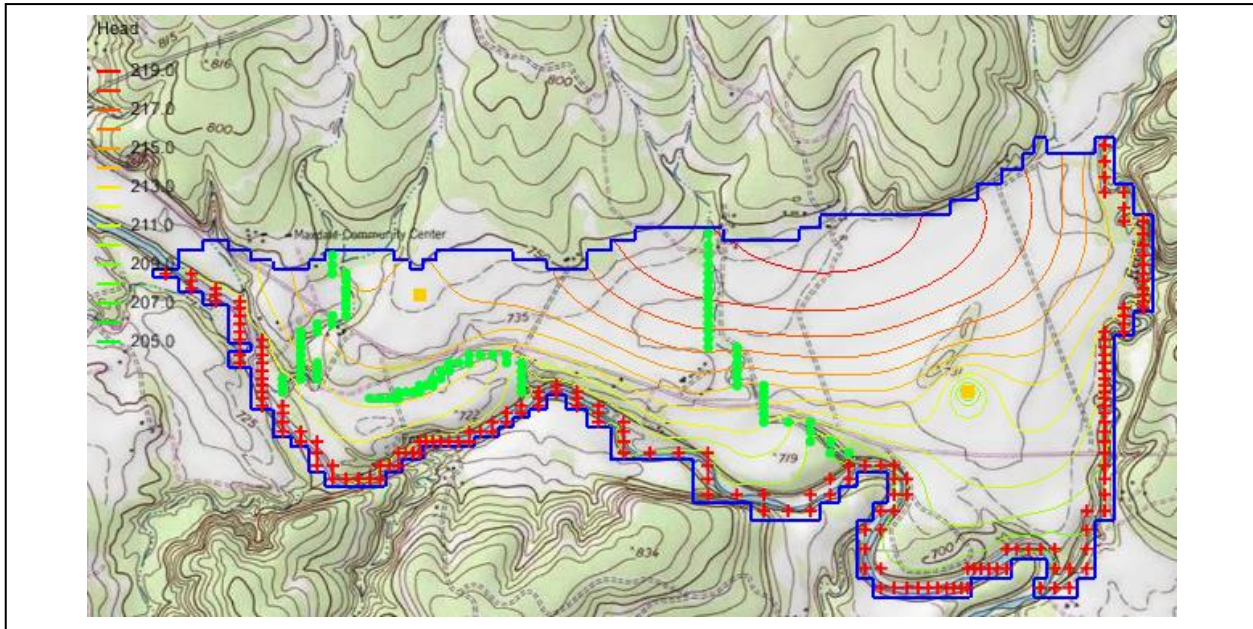

Objectives

The conceptual model approach involves using the GIS tools in the Map module to develop a conceptual model of the site being modeled. The location of sources/sinks, model boundaries, layer parameters (such as hydraulic conductivity), and all other data necessary for the simulation can be defined at the conceptual model level without a grid.

Prerequisite Tutorials

- Feature Objects
- MODFLOW – Grid Approach

Required Components

- Grid Module
- Map Module
- MODFLOW

Time

- 40-60 minutes



1	Introduction	2
1.1	Outline	3
2	Description of Problem	3
3	Getting Started	4
4	Importing the Background Image	4
4.1	Reading the Image	4
5	Saving the Project	4
6	Defining the Units	4
7	Defining the Boundary	5
7.1	Create the Coverage	5
7.2	Create the Arc	5
8	Building the Local Source/Sink Coverage	6
8.1	Defining the Specified Head Arcs	7
8.2	Defining the Drain Arcs	8
8.3	Building the polygons	10
8.4	Creating the Wells	10
9	Delineating the Recharge Zones	12
9.1	Copying the Boundary	12
9.2	Assigning the Recharge Values	12
10	Defining the Hydraulic Conductivity	12
10.1	Copying the Boundary	12
10.2	Assigning values	13
11	Defining the Layer Elevations	13
11.1	Copying the Boundary	13
11.2	Assigning the Elevation	13
12	Locating the Grid Frame	14
13	Creating the Grid	14
14	Initializing the MODFLOW Data	14
15	Defining the Active/Inactive Zones	15
16	Converting the Conceptual Model	15
17	Defining the Starting Head	15
18	Checking the Simulation	15
19	Saving the Project	16
20	Running MODFLOW	16
21	Viewing the Water Table in Side View	16
22	Viewing the Flow Budget	16
23	Conclusion	17

1 Introduction

Two approaches can be used to construct a MODFLOW simulation in GMS: the grid approach or the conceptual model approach. The grid approach involves working directly with the 3D grid and applying sources/sinks and other model parameters on a cell-by-cell basis. The steps involved in the grid approach are described in the tutorial entitled “MODFLOW – Grid Approach.”

The conceptual model approach involves using the GIS tools in the Map module to develop a conceptual model of the site being modeled. The location of sources/sinks, layer parameters (such as hydraulic conductivity), and all other data necessary for the simulation can be defined at the conceptual model level. Once this model is complete, the grid is generated and the conceptual model is converted to the grid model and all of the cell-by-cell assignments are performed automatically. This tutorial describes the steps involved in performing a MODFLOW simulation using the conceptual model approach.

1.1 Outline

Here are the steps of this tutorial:

1. Import a background image.
2. Create and define coverages.
3. Map the coverages to a 3D grid.
4. Convert the conceptual model to MODFLOW.
5. Check the simulation and run MODFLOW.
6. View the results.

2 Description of Problem

The problem that this tutorial will be solving is illustrated in Figure 1. The site is located in east Texas, USA.

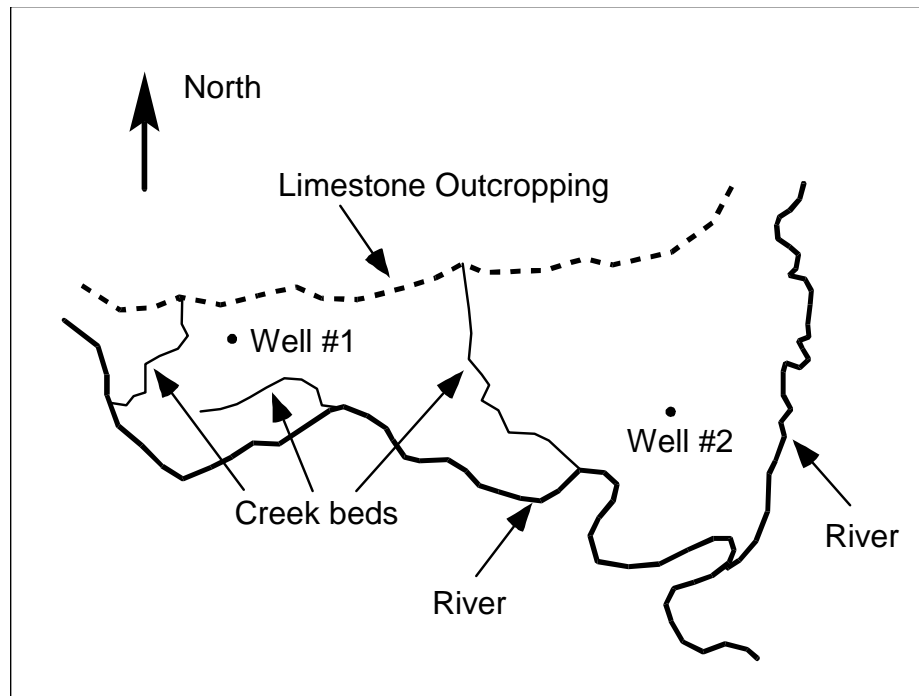


Figure 1 Plan view of site to be modeled

The user will be modeling the groundwater flow in the valley sediments bounded by the hills to the north and the two converging rivers to the south.

The boundary to the north will be a no-flow boundary and the remaining boundary will be a specified head boundary corresponding to the average stage of the rivers. It is necessary to assume that the influx to the system is primarily through recharge due to rainfall. There are some creek beds in the area which are sometimes dry but occasionally fill up due to influx from the groundwater. The user will represent these creek beds using drains. Two production wells in the area will also be included in the model.

3 Getting Started

Do the following to get started.


1. If necessary, launch GMS.
2. If GMS is already running, select the *File / New* command to ensure that the program settings are restored to their default state.

4 Importing the Background Image

The first step in setting up the simulation is to import a digital image of the site being modeled. This image was created by scanning a portion of a USGS quadrangle map on a desktop scanner. The image was imported to GMS, registered, and a GMS project file was saved. To read in the image, open the project file as described in the next section. Once the image is imported to GMS, it can be displayed in the background as a guide for on-screen digitizing and placement of model features.

4.1 Reading the Image

Do as follows to import the image:


1. Select the **Open**  button.
2. Locate and open the directory entitled *Tutorials\MODFLOW\modfmap*.
3. Open the file entitled “start.gpr.”

All other objects in GMS are drawn on top of the image. The image only appears in plan view. The user may wish to import other images located in the same folder.

5 Saving the Project

Before making any changes, save the project under a new name.

1. Select the *File | Save As* command.
2. In the *Save As* dialog, save the project with the name “eastex.”

Be sure to hit the **Save**  button periodically while developing the model.

6 Defining the Units

At this point, it is also possible to define the units used in the conceptual model. The chosen units will be applied to edit fields in the GMS interface to remind the user of the proper units for each parameter.


1. Select the *Edit | Units* command.
2. In the *Units* dialog, for *Length*, click the “...” button next to the *Length* field.
3. In the *Display Projection* dialog, select “Meters” in the *Units* dropdown list for *Vertical*.

4. Check to be sure that meters are being used for *Global projection* under the *Horizontal* option. If not, select the **Set Projection** button and change the *Planar Units* in the *Select Projection* dialog to “Meters.”
5. For *Time*, select “d” (for days). The other units can be ignored because they are not used for flow simulations.
6. Select the **OK** button.



7 Defining the Boundary

The first step is to define the outer boundary of the model. This will be done by creating an arc which forms a closed loop around the site.

7.1 Create the Coverage

1. In the Project Explorer, right-click on the empty space.
2. Then, from the pop-up menu, select the *New / Conceptual Model* command.
3. IN the *Conceptual Model Properties* dialog, for the *Name*, enter “East Texas.”
4. For the *Type*, select “MODFLOW.”
5. Click **OK**.
6. Right-click on the “East Texas”  conceptual model and select the **New Coverage** command from the pop-up menu.
7. In the *Coverage Setup* dialog, change the *Coverage name* to “Boundary.”
8. Change the *Default elevation* to “213.”
9. Click **OK**.

7.2 Create the Arc

1. Click on the newly created “Boundary”  coverage to switch the dynamic tools to the Map Module tools.
2. Select the **Create Arc**  tool.
3. Begin the arc by clicking once on the left (west) side of the model at the location shown in Figure 2.
4. Create the arc by proceeding around the boundary of the site in a counter-clockwise direction and clicking on a sequence of points around the boundary. Don't worry about the spacing or the exact location of the points; just use enough points to define the approximate location of the boundary. The boundary on the south and east sides of the model should coincide with the rivers as shown in Figure 2. The boundary along the top should coincide to the limestone outcropping as shown in Figure 2.
5. To end the arc, click on the starting point.

Note: As the user is clicking on the points, if he or she makes a mistake and wishes to back up a point or two, press the *Backspace* key. If the user wishes to abort the arc and start over, press the *Esc* key.

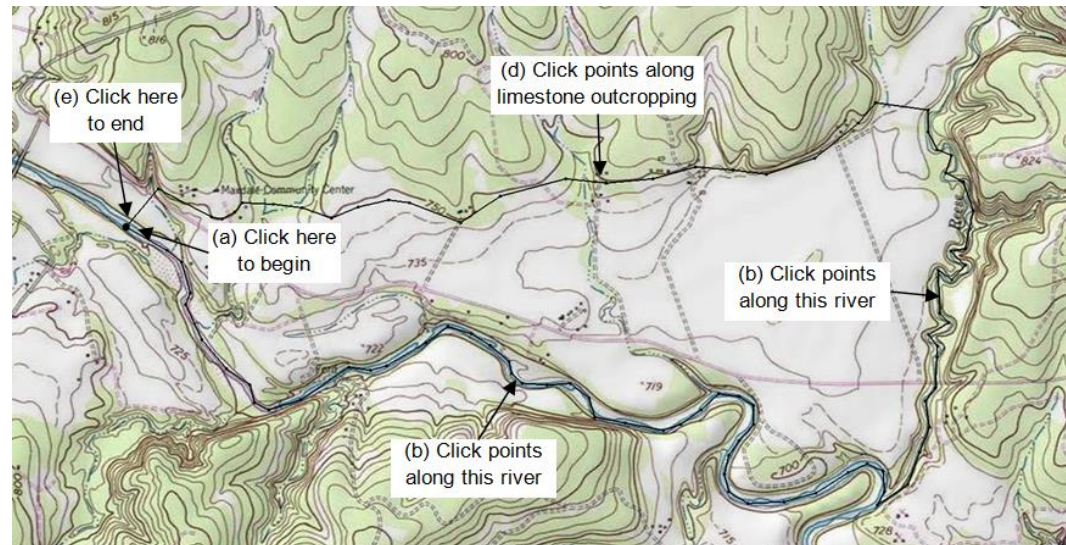




Figure 2 Creating the boundary arc

8 Building the Local Source/Sink Coverage

The next step in building the conceptual model is to construct the local sources/sinks coverage. This coverage defines the boundary of the region being modeled and defines local sources/sinks including wells, rivers, drains, and general head boundaries.


The properties that can be assigned to the feature objects in a coverage depend on the conceptual model and the options set in the *Coverage Setup* dialog. Before creating the feature objects, it is necessary to change the options in the *Coverage Setup* dialog.

1. Right-click on the “Boundary”  coverage and select the **Duplicate** command from the pop-up menu.
2. Right-click on the new coverage and select **Properties** from the pop-up menu.
3. In the *Properties* dialog, change the new coverage name to “Sources & Sinks,” then click **OK**.
4. Right-click on the “Sources & Sinks”  coverage and select the **Coverage Setup** command from the pop-up menu.
5. In the *Coverage Setup* dialog, locate the list of *Sources/Sinks/BCs* and turn on the following options:
 - *Wells*
 - *Refinement*
 - *Specified Head (CHD)*
 - *Drain*
6. Make sure the *Use to define model boundary (active area)* option is on.

- Click **OK**.

8.1 Defining the Specified Head Arcs

The next step is to define the specified head boundary along the south and east sides of the model. Before doing this, however, it is necessary to first split the arc that was just created into three arcs. One arc will define the no-flow boundary along the top and the other two arcs will define the two rivers. An arc is split by selecting one or more vertices on the arc and converting the vertices to nodes.

- Select the **Select Vertices**  tool.
- Holding down the *Shift* key, select the two vertices shown in Figure 3. Vertex #1 is located at the junction of the two rivers. Vertex #2 is located at the top of the river on the east side of the model.
- Right-click on one of the selected vertices, and select **Vertex → Node** command.

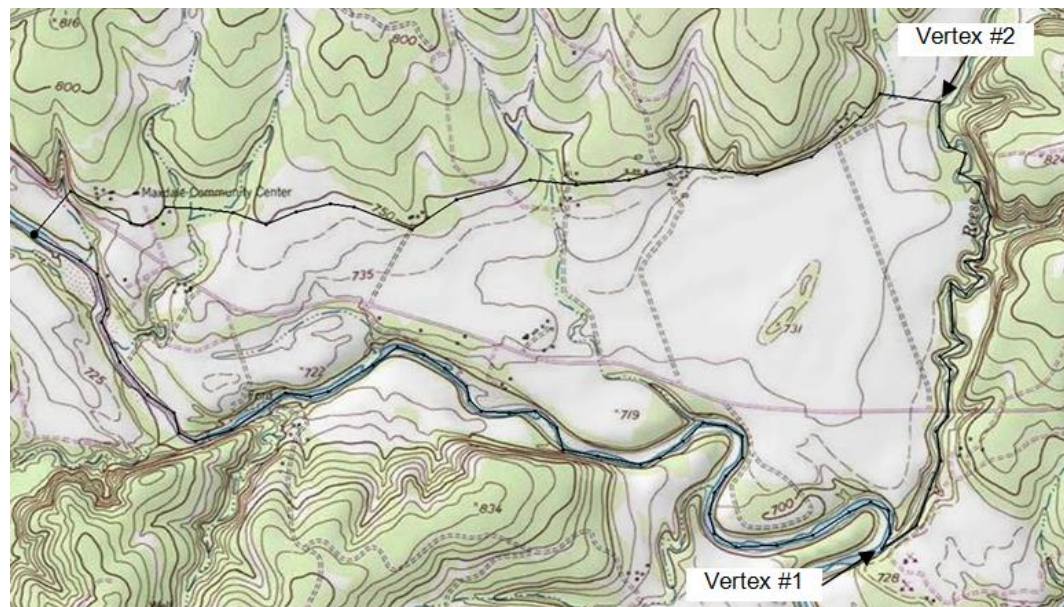



Figure 3 Convert vertices to nodes


Now that the three arcs have been defined, the two arcs on the rivers should be classified as specified head arcs.

- Select the **Select Arcs**  tool.
- Select the arcs on the south and east and (right and bottom) sides of the model by selecting one arc and holding down the *Shift* key while selecting the other arc.
- Right-click on one of the selected arcs and select the **Attribute Table** command from the pop-up menu.
- In the *Attribute Table* dialog, find the spreadsheet cell corresponding to the *All* row and the *Type* column. In this cell, select the “spec. head (CHD)” type. This will change the types for both arcs.
- Select the **OK** button.

6. Click anywhere on the model other than on the arcs to unselect them.


Note that the color of the arcs has changed indicating the type of the arc.

The next step is to define the head at the nodes at the ends of the arcs. The head along a specified head arc is assumed to vary linearly along the length of the arc.

7. Select the **Select Points/Nodes**  tool.
8. Double-click on the node on the west (left) end of the arc on the southern (bottom) boundary.
9. In the *Attribute Table* dialog, enter a constant value of “212” for the *Head-Stage*.
10. Select the **OK** button.
11. In a similar fashion, assign a value of “208” to the node at the junction of the two rivers and a value of “214” to the node at the top of the arc on the east boundary of the model.

8.2 Defining the Drain Arcs

At this point, it is possible to enter the arcs at the locations of the creek beds to define the drains.

1. Select the **Create Arc**  tool.
2. Create the arc labeled as arc #1 in Figure 4. Start by clicking on the bottom arc, create the arc by clicking points along the creek bed, and end the arc by double-clicking on the top arc.

Notice that when clicking in the vicinity of a vertex on an existing arc or on the edge of an arc, GMS automatically snaps the arc being created to the existing arc and makes a node at the junction of the two arcs.

3. Create the arcs labeled arc #2 in Figure 4 by clicking on the bottom arc, clicking points along the creek bed, and then double-clicking at the end of the creek bed.
4. Create arc #3 in Figure 4 the same way that arc #1 was made.

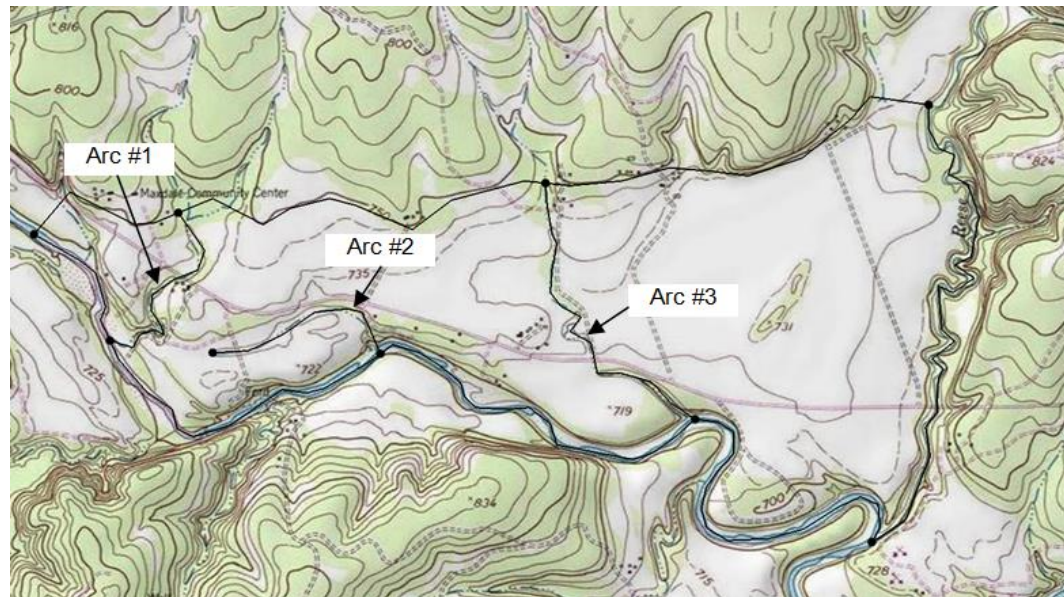



Figure 4 The drain arcs

Next, the user will define the arcs as drains and assign the conductance and elevation to the arcs.

5. Select the **Select Arcs**  tool.
6. Select all of the drain arcs by clicking on the arcs while holding down the *Shift* key.
7. Right-click on one of the selected arcs and select **Attribute Table** command from the pop-up menu.
8. In the *Attribute Table* dialog in the *All* row and *Type* column, select the “drain” option.
9. Enter a *Cond.* (conductance) of “555” in the *All* row.

Conductance is calculated using the following formula:

$$C = \frac{kA}{L}$$

Where *k* is the hydraulic conductivity, *A* is the gross cross-sectional area, and *L* is the flow length. In this tutorial, the user will assume that the hydraulic conductivity is 12 m/day, the drain width is 9.25 m, and the flow length is 0.2 m. This will give a conductance of 555 (m²/day)/(m).

This represents a conductance per unit length value. GMS automatically computes the appropriate cell conductance value when the drains are assigned to the grid cells.

10. Select the **OK** button.

The elevations of the drains are specified at the nodes of the arcs. The elevation is assumed to vary linearly along the arcs between the specified values.

11. Select the **Select Points/Nodes**  tool.

12. Double-click on Node 2 in Figure 5. Notice that this node has two properties associated with it since it is attached to 2 arcs of different types.
13. In the *Attribute Table* dialog, enter “210” for the *Bot. elev.* of the *drain* property. Do NOT change anything in the *spec. head* property.
14. Click **OK**.

Repeat this procedure to assign the drain elevations to the nodes shown in Figure 5. Be sure to change the *drain* property only, and NOT the *spec. head* property.

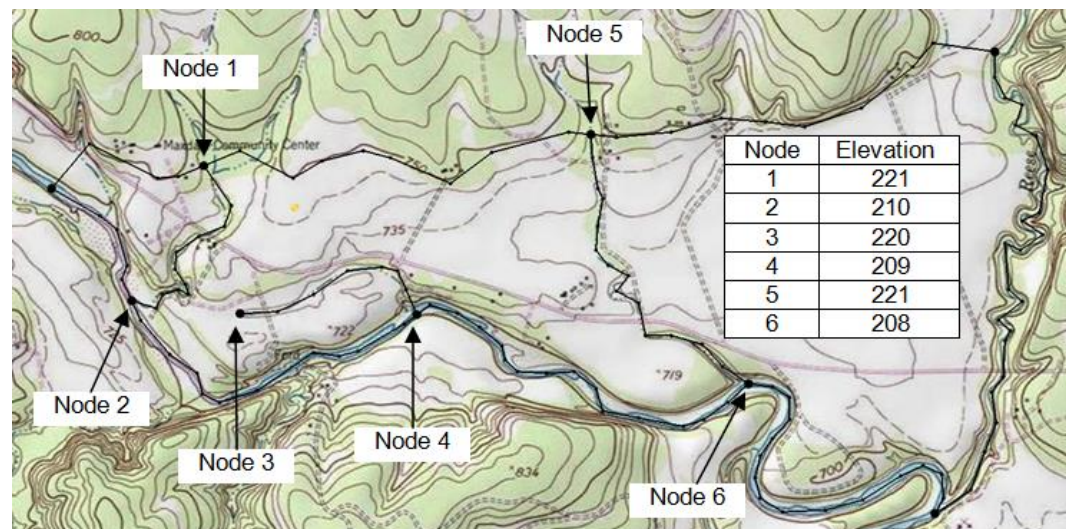


Figure 5 Elevations for drain nodes

8.3 Building the polygons

With the local sources/sinks type coverage, the entire region to be modeled must be covered with non-overlapping polygons. This defines the active region of the grid. In most cases, all of the polygons will be variable head polygons (the default). However, other polygons may be used.

For example, to model a lake, a general head polygon can be used. The simplest way to define the polygons is to first create all of the arcs used in the coverage and then select the *Build Polygons* command. This command searches through the arcs and creates a polygon for each of the closed loops defined by the arcs. These polygons are of type “NONE” by default but may be converted to other types by selecting the polygons and using the **Properties** command.




Now that all of the arcs in the coverage have been created, it is possible to construct the polygons. All of the polygons will be variable head polygons.

1. Select the **Build Polygons**  macro.

Notice that the polygon is now filled. The user can change the view of the by selecting the *Display / Display Options* command.



8.4 Creating the Wells

The final step in creating the local sources/sinks coverage is to define the wells. Wells are defined as point type objects. Two wells will be created.

2. Select the **Create Point**  tool.
3. Move the cursor to the approximate location of Well #1 shown in Figure 1 and click once with the mouse to create the point.
4. While the new point is selected, type the coordinates “613250” and “3428630” in the *X* and *Y* fields respectively at the top of the GMS window.
5. Hit the *Tab* or *Enter* key.
6. Select the **Properties**  button.
7. In the *Attribute Table* dialog, for the *Type*, select the “well” option.
8. For the *Flow rate*, enter a constant value of “-50.”
9. Select the **OK** button.
10. In a similar fashion, create Well #2 at the location seen in Figure 1.
11. Enter “615494” and “3428232” for the *X* and *Y* fields respectively.
12. Hit the *Tab* or *Enter* key.
13. Select the **Properties**  button.
14. In the *Attribute Table* dialog, for the *Type*, select the “well” option.
15. For the *Flow rate*, assign a pumping rate of “-300.”
16. Select **OK**.

Grid Refinement

A well represents a point of convergence in the groundwater flow and causes steep gradients in the head near the well. In order to accurately model the flow near wells, the grid is typically refined in the vicinity of the wells. This type of refinement can be performed automatically in GMS by assigning refinement data directly to the wells in the conceptual model.




1. Select the **Select Points/Nodes**  tool.
2. Select both wells by clicking on the wells while holding the *Shift* key.
3. Select **Properties**  button.
4. In the *Attribute Table* dialog, find the *Refine* column (scroll to the right);
5. Then, in the *All* row, turn on the toggle. This turns on refinement for both points.
6. For both points, change the *Base size* to “25.”
7. For both points, make sure the *Bias* is “1.1.”
8. For both points, change the *Max size* to “150.”
9. Click **OK**.

9 Delineating the Recharge Zones

The next step in constructing the conceptual model is to construct the coverage that defines the recharge zones. The user will assume that the recharge over the area being modeled is uniform.

9.1 Copying the Boundary

The user will create the recharge coverage by copying the boundary.


1. Right-click on the “Boundary”  coverage and select the **Duplicate** command from the pop-up menu.
2. Right-click on the “Copy of Boundary”  coverage and select **Properties** from the pop-up menu.
3. Change the name of the new coverage to “Recharge,” and click **OK**.
4. Right-click on the “Recharge”  coverage and select the **Coverage Setup** command.
5. In the *Coverage Setup* dialog, on the *Areal Properties* list, turn on the *Recharge rate* property.
6. Select the **OK** button.

Now that the arcs are defined, the user can build the polygons.

7. Select the **Build Polygons**  macro.

9.2 Assigning the Recharge Values

Now that the recharge zones are defined, it is possible assign the recharge values. The user will assign value to the polygon.

1. Select the **Select Polygons**  tool.
2. Double-click on the polygon.
3. In the *Attribute Table* dialog, change the *Recharge rate* to “0.0001.”

This value was obtained by multiplying 30 inches of rainfall a year (.75 m) by 5% and dividing by 365.




4. Select the **OK** button.

10 Defining the Hydraulic Conductivity

Next, the user will enter the hydraulic conductivity. In many cases, the user may wish to define multiple polygons defining hydraulic conductivity zones. For the sake of simplicity, this tutorial will use a constant value for the entire grid.




10.1 Copying the Boundary

The user will create the layer coverage by copying the boundary.

1. Right-click on the “Boundary”  coverage and select the *Duplicate* command from the pop-up menu.
2. Right-click on the “Copy of Boundary”  coverage and select **Properties** from the pop-up menu.
3. Change the name of the new coverage to “Layer 1,” and select **OK**.
4. Right-click on the “Layer 1”  coverage and select the **Coverage Setup** command.
5. In the *Coverage Setup* dialog, on the *Areal Properties* list, turn on the *Horizontal K* option.
6. Select the **OK** button.

10.2 Assigning values

The user will assign a K value for the layer.




1. Select the “Layer 1”  coverage in the Project Explorer.
2. Select the **Build Polygons**  macro.
3. With the **Select Polygons**  tool, double-click on the polygon.
4. Change the *Horizontal K* to “5.5.”
5. Select the **OK** button.

11 Defining the Layer Elevations

The final step is to define the layer elevations of the model. In this tutorial, the user will set a constant elevation for the top and bottom of the grid. In other tutorials, the user can learn how to interpolate elevations from points to get more realistic layer elevations.


11.1 Copying the Boundary


The user will create the layer coverage by copying the boundary.

1. Right-click on the “Boundary”  coverage and select the **Duplicate** command from the pop-up menu.
2. Right-click on the “Copy of Boundary”  coverage and select **Properties** from the pop-up menu.
3. In the *Properties* dialog, change the name of the new coverage to “Layer Elevations,” and click **OK**.
4. Select the **Build Polygons**  macro.

11.2 Assigning the Elevation



Now the user will assign values to the polygon.

1. Right-click on the “Layer Elevations”  coverage and select the **Coverage Setup** command.

2. In the *Coverage Setup* dialog, on the *Areal Properties* list, turn on the following options, and then click **OK**:
 - *Top elev.*
 - *Bottom elev.*
3. With the *Select Polygons* tool , double click on the polygon.
4. Change the *Top elev* to “230.”
5. Change the *Bottom elev* to “175.”
6. Click **OK**.


12 Locating the Grid Frame

Now that the coverages are complete, it is possible to create the grid. The first step in creating the grid is to define the location and orientation of the grid using the Grid Frame. The Grid Frame represents the outline of the grid. It can be graphically positioned on top of the site map.

1. In the Project Explorer, right-click on the empty space.
2. From the pop-up menu, select the *New / Grid Frame* command.
3. Select the **Select Grid**  tool.
4. In the Project Explorer, right-click on the *Grid Frame*  and select the **Fit to Active Coverage** command.

13 Creating the Grid

Now that the coverages and the Grid Frame are created, it is now possible to create the grid.

1. Select the “Sources & Sinks”  coverage in the Project Explorer.
2. Select the *Feature Objects | Map → 3D Grid* command.

Notice that the grid is dimensioned using the data from the Grid Frame. If a Grid Frame does not exist, the grid is defaulted to surround the model with approximately 5% overlap on the sides. Also note that the number of cells in the x and y dimensions cannot be altered. This is because the number of rows and columns and the locations of the cell boundaries will be controlled by the refine point data entered at the wells.

3. Select the **OK** button.

14 Initializing the MODFLOW Data


Now that the grid is constructed and the active/inactive zones are delineated, the next step is to convert the conceptual model to a grid-based numerical model. Before doing this, however, it is necessary to first initialize the MODFLOW data.

1. Right-click on the “grid”  item in the Project Explorer.

2. Select the **New MODFLOW** command.
3. In the *MODFLOW Global/Basic Package* dialog, select the **OK** button.

15 Defining the Active/Inactive Zones


Now that the grid is created, the next step is to define the active and inactive zones of the model. This is accomplished automatically using the information in the local sources/sinks coverage.

1. Select the “Sources & Sinks”  coverage in the Project Explorer.
2. Select the *Feature Objects* / **Activate Cells in Coverage(s)** command.

Each of the cells in the interior of any polygon in the local sources/sinks coverage is designated as active and each cell which is outside of all of the polygons is designated as inactive. Notice that the cells on the boundary are activated such that the no-flow boundary at the top of the model approximately coincides with the outer cell edges of the cells on the perimeter while the specified head boundaries approximately coincide with the cell centers of the cells on the perimeter.

16 Converting the Conceptual Model

It is now possible to convert the conceptual model from the feature object-based definition to a grid-based MODFLOW numerical model.

1. Right-click on the “East Texas”  conceptual model and select the *Map To* / **MODFLOW / MODPATH** command.
2. Make sure the *All applicable coverages* option is selected, and select **OK**.

Notice that the cells underlying the drains, wells, and specified head boundaries were all identified and assigned the appropriate sources/sinks. The heads and elevations of the cells were determined by linearly interpolating along the specified head and drain arcs. The conductances of the drain cells were determined by computing the length of the drain arc overlapped by each cell and multiplying that length by the conductance value assigned to the arc. In addition, the recharge and hydraulic conductivity values were assigned to the appropriate cells.

17 Defining the Starting Head

It is necessary to define the starting head before the user can run MODFLOW. Since the user will use the top elevation (230 m) as the starting head values, it will not be necessary to make any changes because the starting heads are set to the grid top elevation by default.

18 Checking the Simulation

At this point, the user has completely defined the MODFLOW data and is now ready to run the simulation. Now it is advisable to run the *Model Checker* to see if GMS can identify any mistakes that may have been made.

1. Select the *MODFLOW* | **Check Simulation** command.
2. Select the **Run Check** button. There should be no errors.
3. Select the **Done** button to exit the *Model Checker*.

19 Saving the Project

Now it is necessary to save the project and run MODFLOW.

1. Select the **Save**  button.

Note: Saving the project not only saves the MODFLOW files but it saves all data associated with the project including the feature objects and scatter points.

20 Running MODFLOW





The user is now ready to run MODFLOW.


1. Select the *MODFLOW* / **Run MODFLOW** command. At this point, MODFLOW is launched, and the *Model Wrapper* appears.
2. When the solution is finished, select the **Close** button.

Contours should appear. These are contours of the computed head solution.

21 Viewing the Water Table in Side View

Another interesting way to view a solution is in side view.

1. Select “MODFLOW” in the Project Explorer.
2. Choose the **Select Cell**  tool.
3. Select a cell somewhere near the well on the right side of the model.
4. Select the **Side View**  button.
5. Turn off the “Grid Frame”  if it is on.
6. Use the **Frame Image**  tool.

Notice that the computed head values are used to plot a water table profile. Use the arrow buttons  in the main toolbar to move back and forth through the grid. The user should see a cone of depression at the well. When finished, do the following:

7. Select the **Plan View**  button.

22 Viewing the Flow Budget


The MODFLOW solution consists of both a head file and a cell-by-cell flow (CCF) file. GMS can use the CCF file to display flow budget values. For example, the user may want to know if any water exited from the drains. This can be accomplished simply by clicking on a drain arc.

1. Select the “Map Data”  folder in the Project Explorer.
2. Choose the **Select Arcs**  tool.
3. Click on the rightmost drain arc.

Notice that the total flow through the arc is displayed in the strip at the bottom of the window. Next, the user will view the flow to the river.

4. Click on one of the specified head arcs at the bottom and view the flow.
5. Hold down the *Shift* key and select each of the specified head arcs.

Notice that the total flow is shown for all selected arcs. Flow for a set of selected cells can be displayed as follows:

6. Select the “3D Grid Data”  folder in the Project Explorer.
7. Select a group of cells by dragging a box around the cells.
8. Select the *MODFLOW* | **Flow Budget** command.

The *Flow Budget* dialog shows a comprehensive flow budget for the selected cells.

9. Select **OK** to exit the dialog.
10. Click anywhere outside the model to unselect the cells.

23 Conclusion

This concludes the “MODFLOW – Conceptual Model Approach I” tutorial. Here are the Key concepts from this tutorial:

- A background image can be imported to help the user construct the conceptual model.
- It is usually a good idea to define the model boundary in a coverage and copy that coverage whenever it is necessary to create a new coverage.
- It is possible to customize the set of properties associated with points, arcs and polygons by using the *Coverage Setup* dialog.
- Some arc properties, like head, are not specified by selecting the arc but by selecting the nodes at the ends of the arc. That way the property can vary linearly along the length of the arc.
- A grid frame can be used to position the grid, but is not required.
- It is necessary to use the *Map* → *MODFLOW* / **MODPATH** command every time that conceptual model data is transferred to the grid.